

Comparison Between the Crack Areas for Different Fiber Contents

FIG. 1


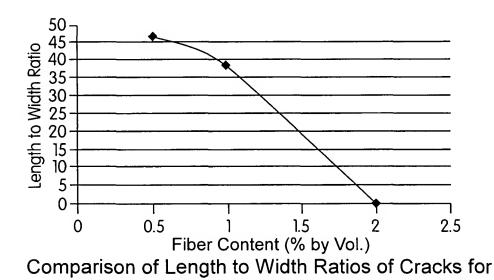


FIG. 2


Different Fiber Contents

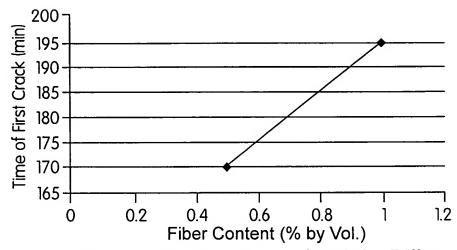

Comparison of Time of First Crack for Different Fiber Contents


Note: Slabs with 2% Fiber Content Did not Crack

FIG. 3

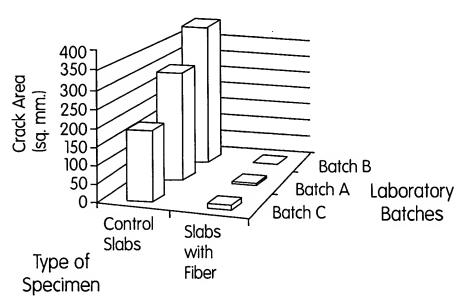


Comparison of Crack Areas between Control Slabs and Slabs With Fiber for Different Laboratory Batches

FIG. 4

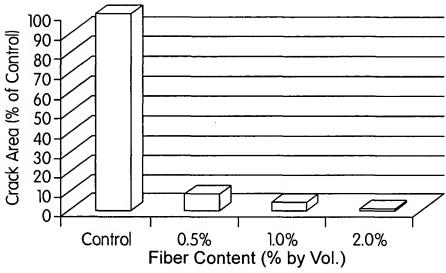


Comparison of Crack Areas as a Percentage of Control for Different Fiber Contents


FIG. 5

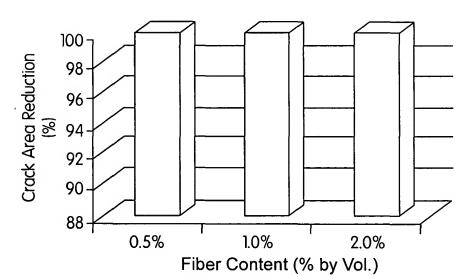



Comparison of Crack Area Reduction for Different Fiber Contents


FIG. 6

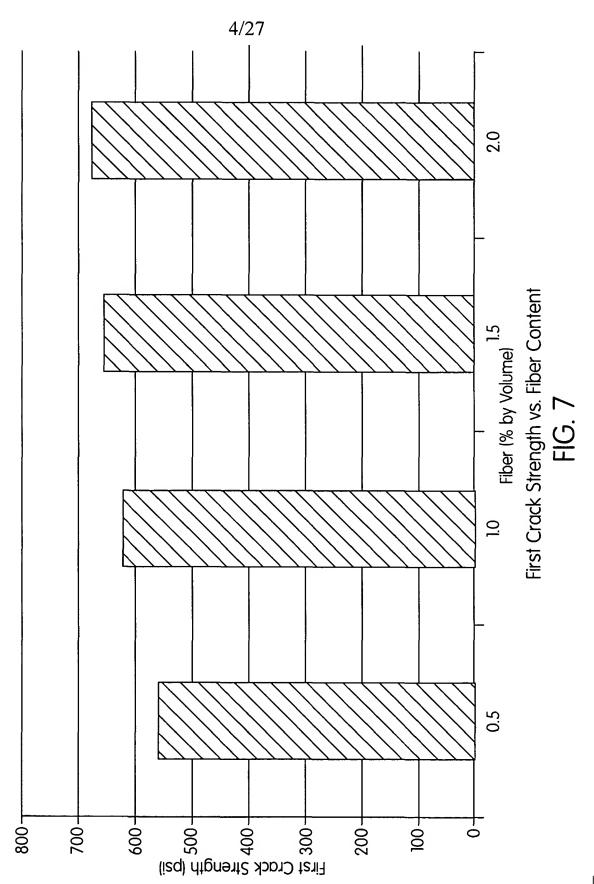


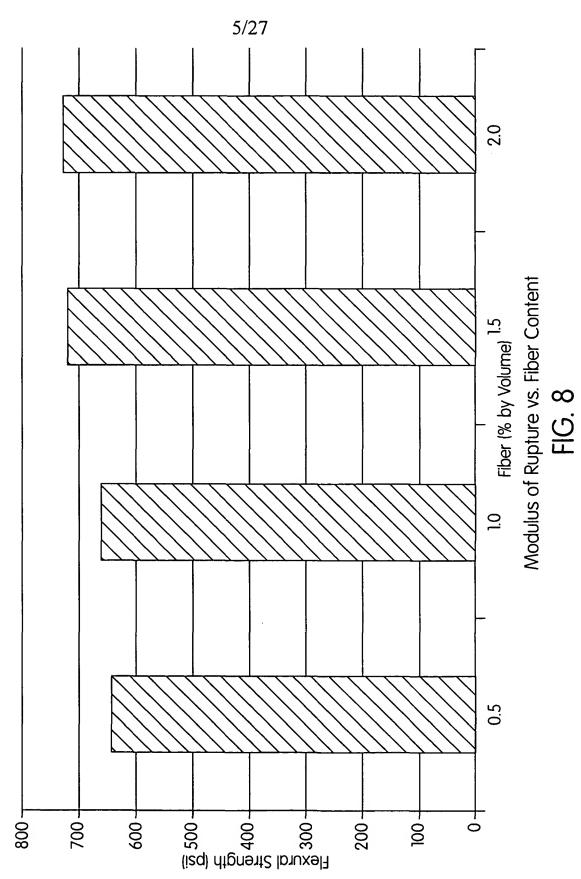


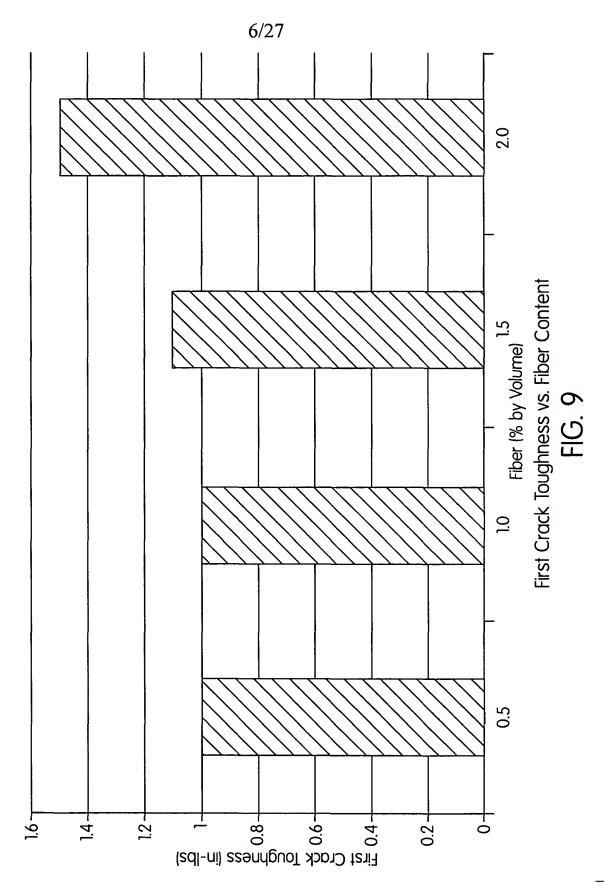


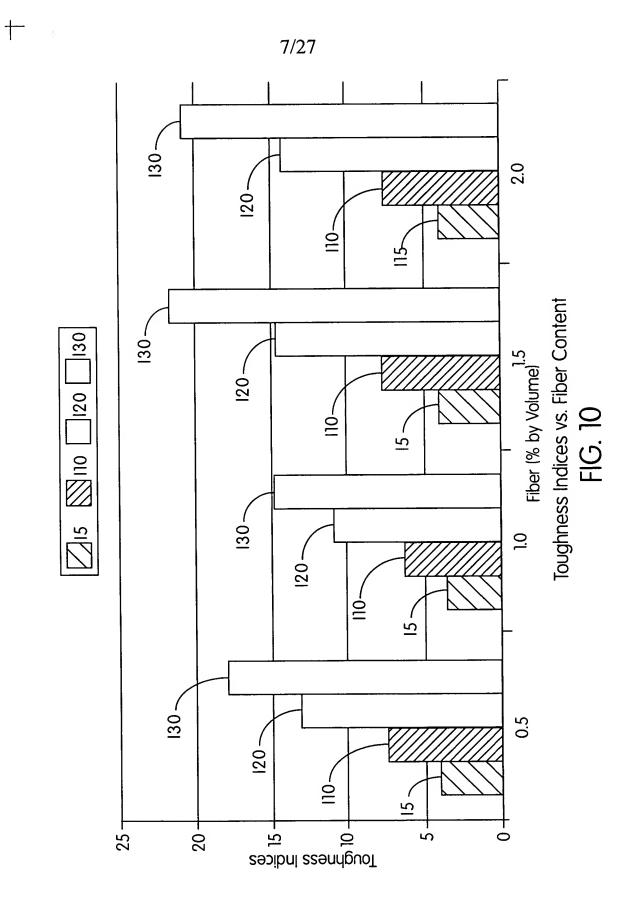


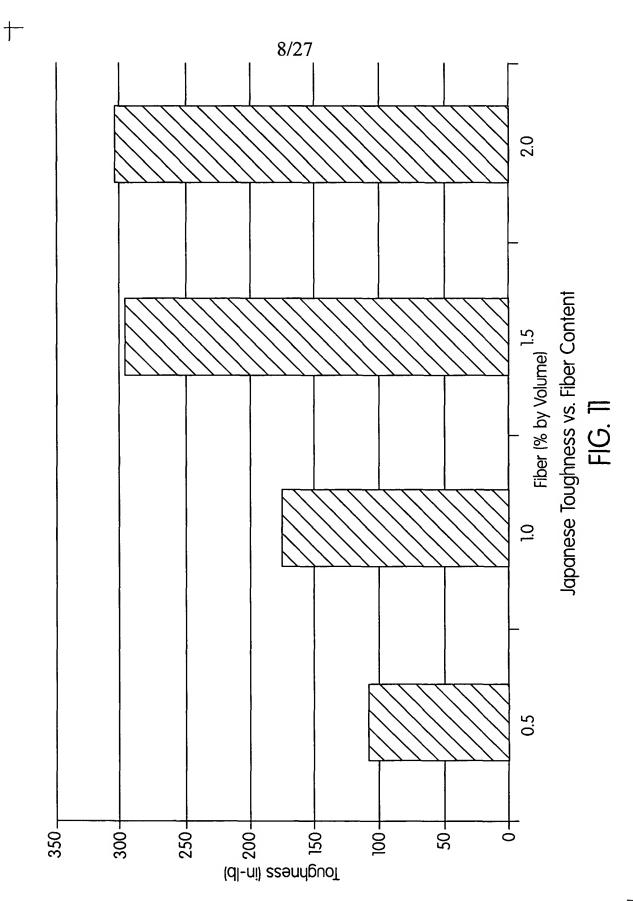


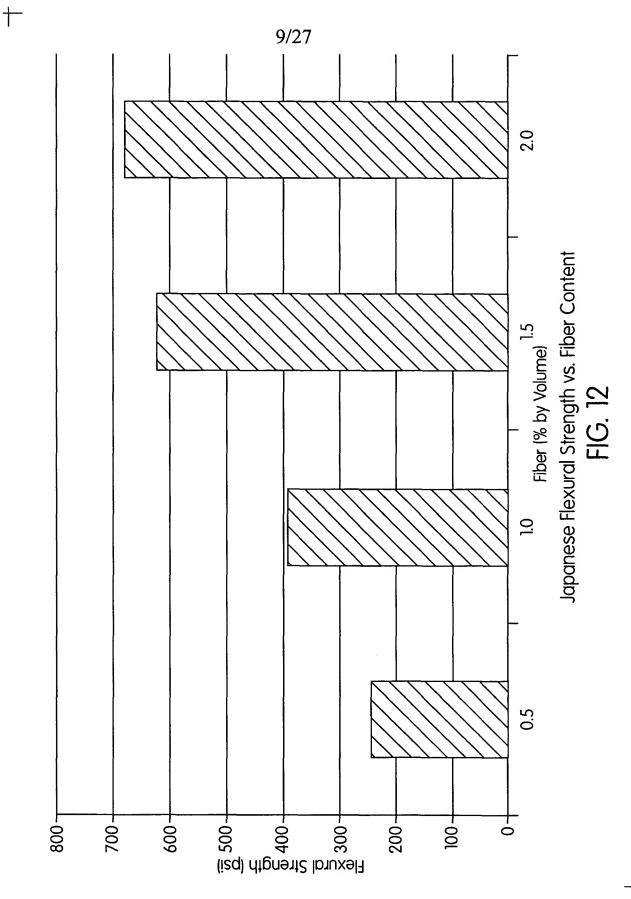


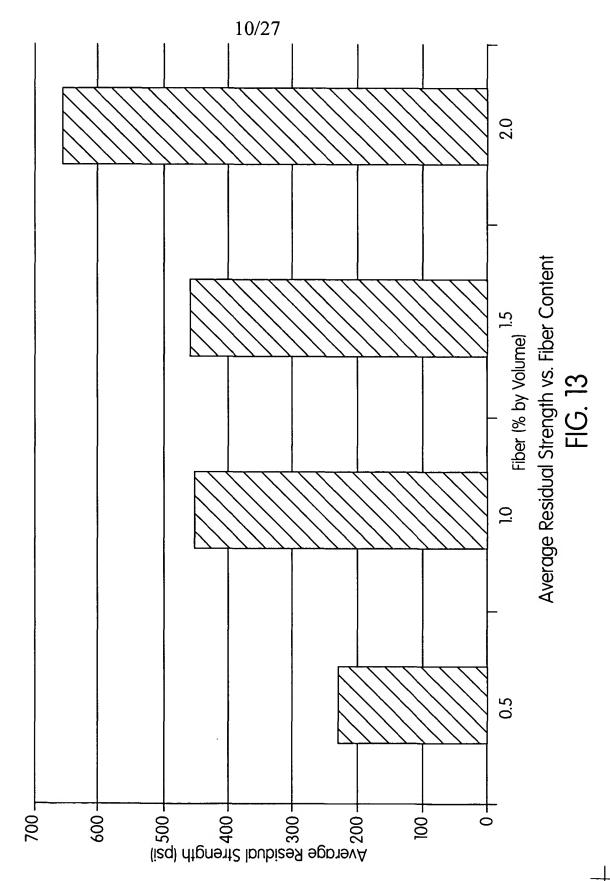


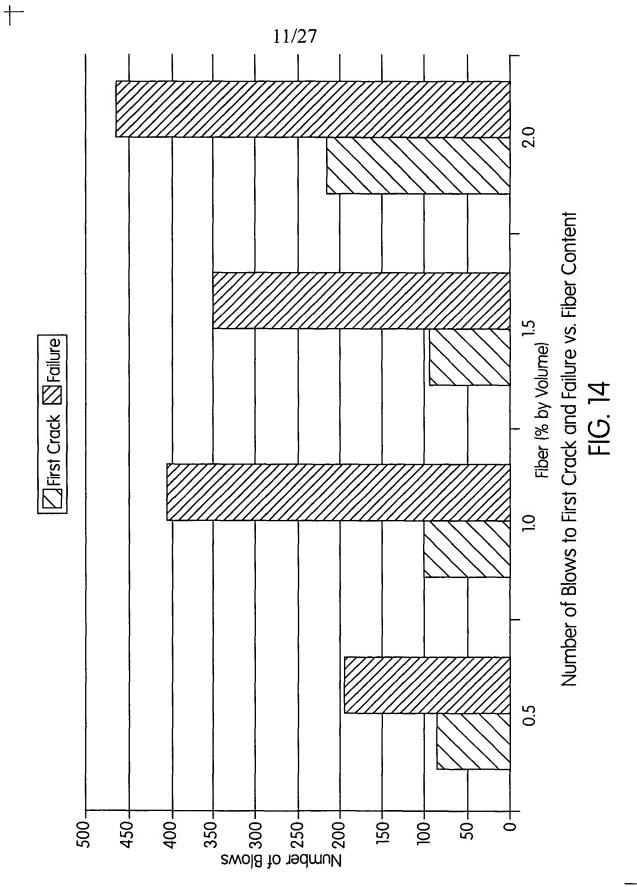


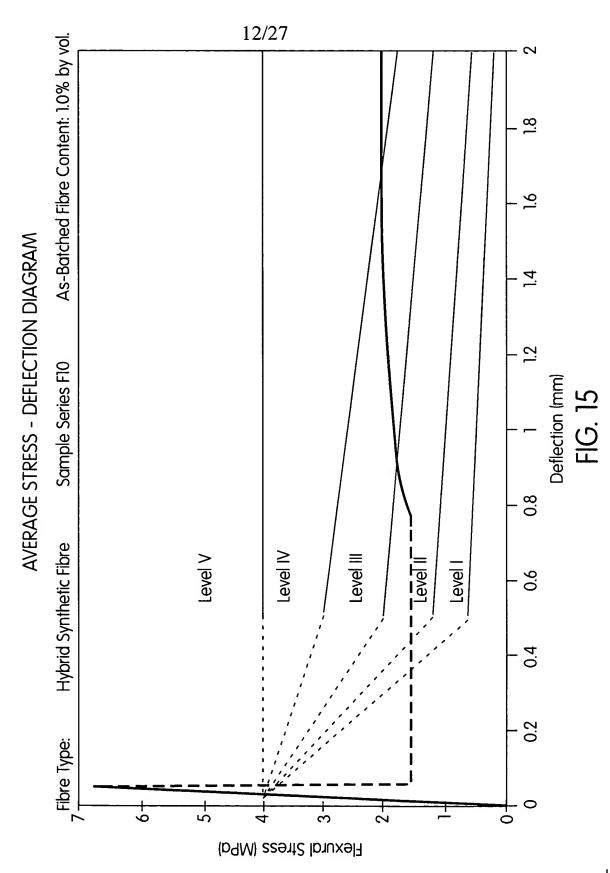


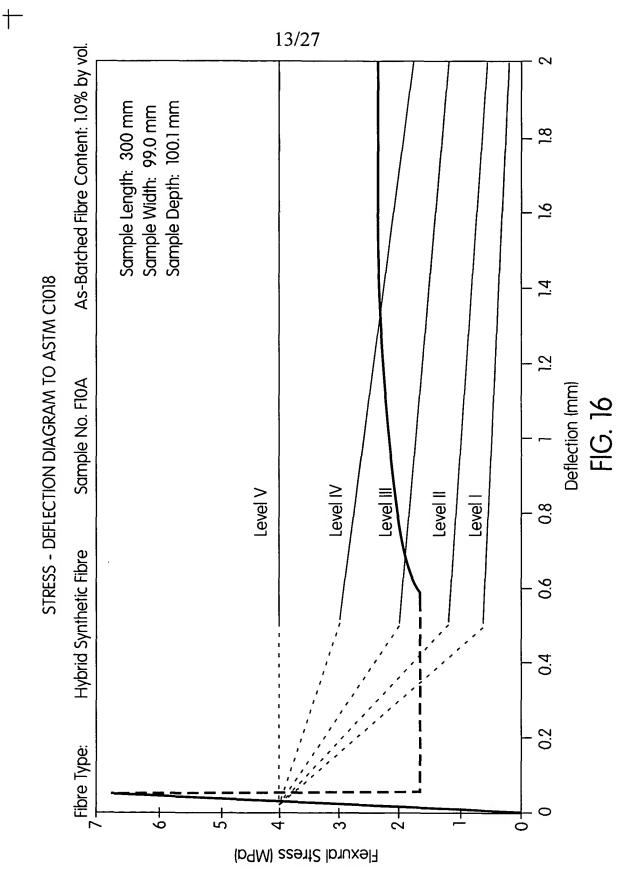


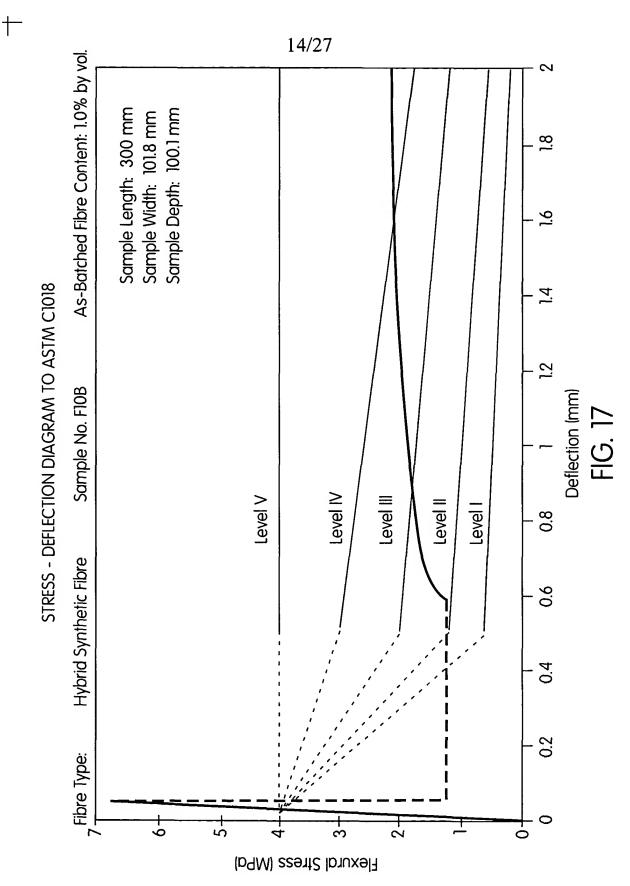


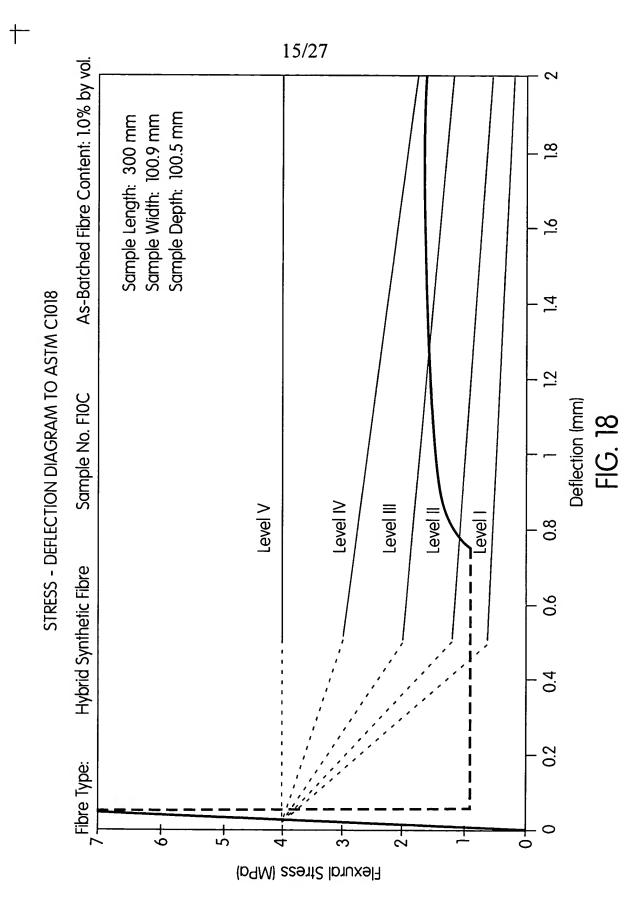


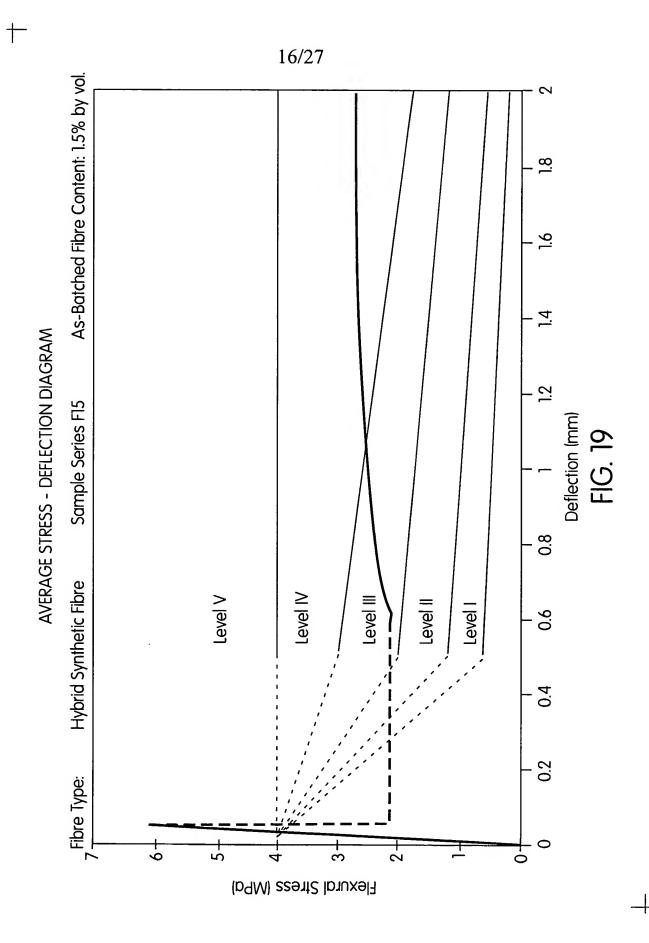


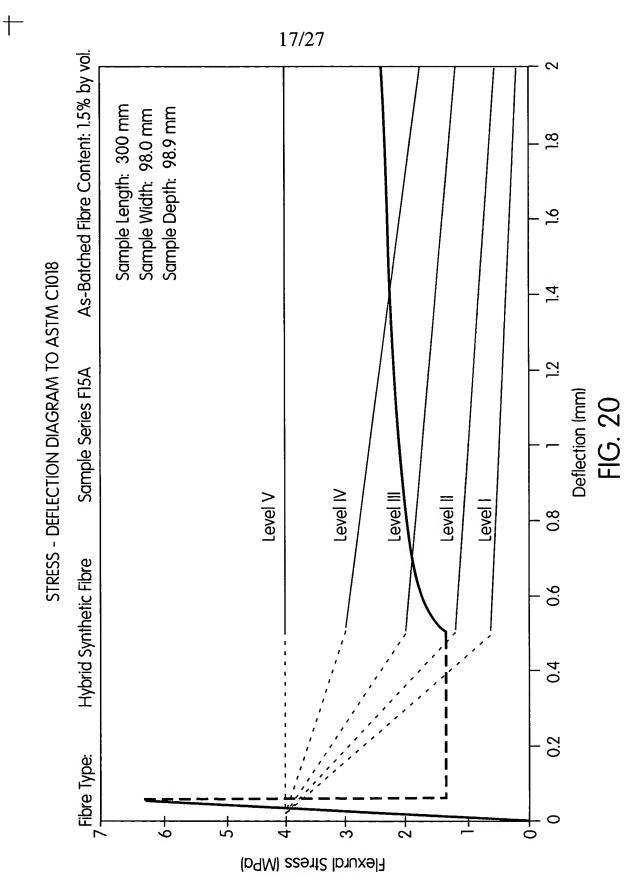


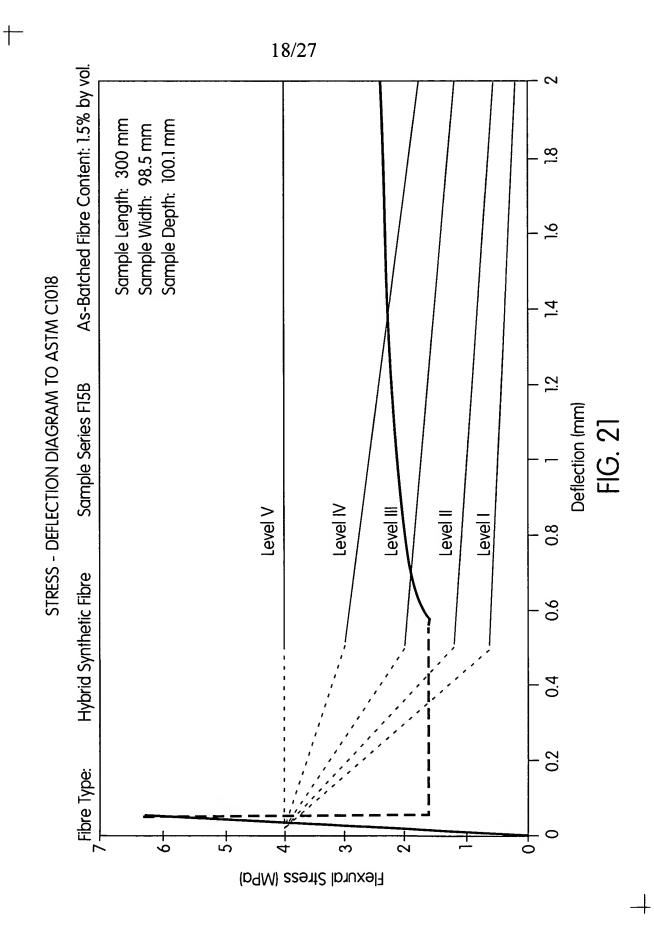


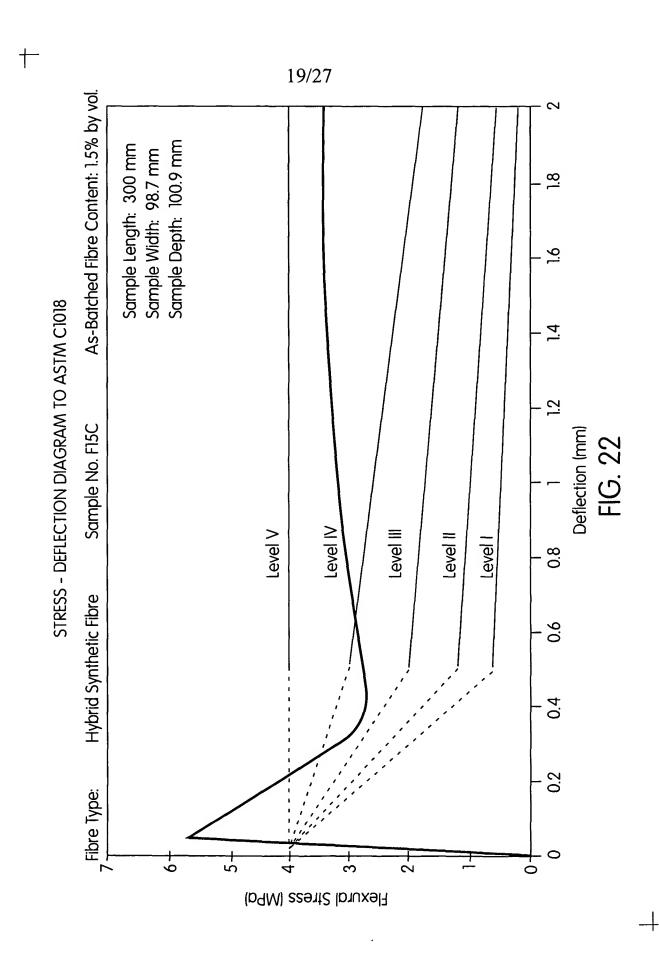

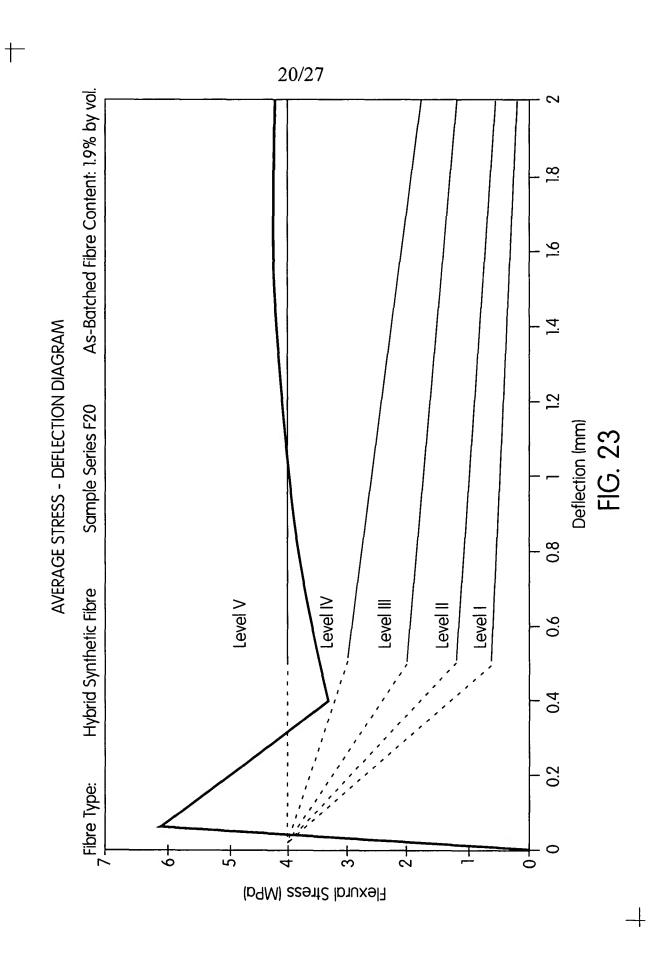

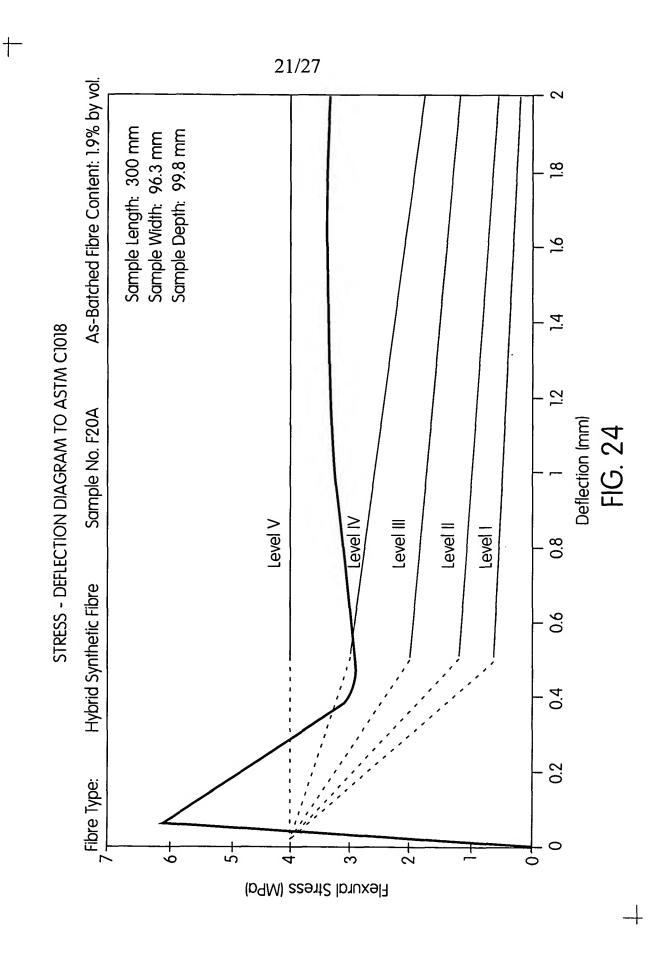

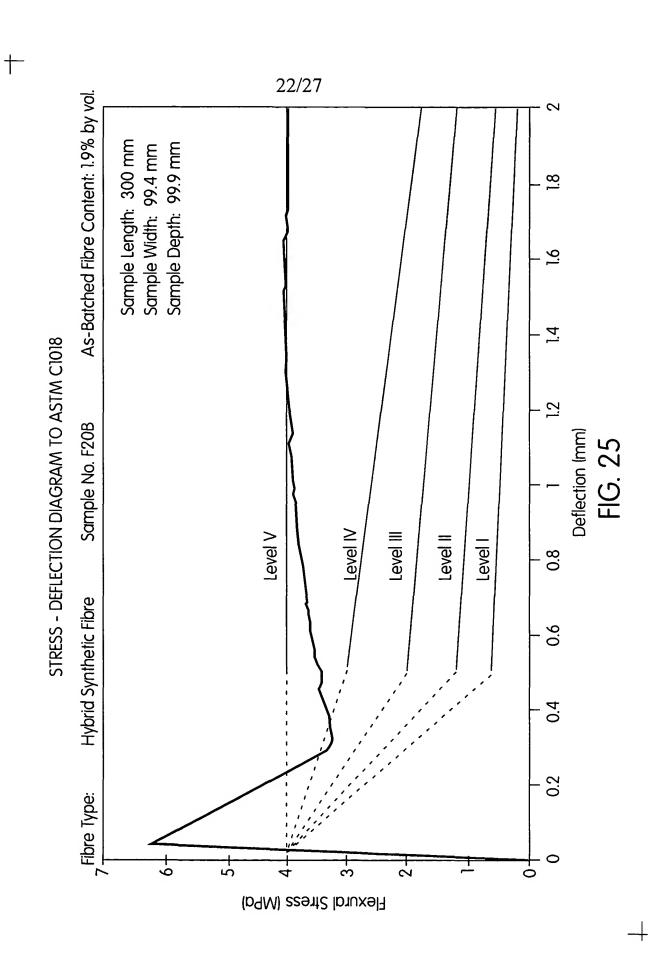


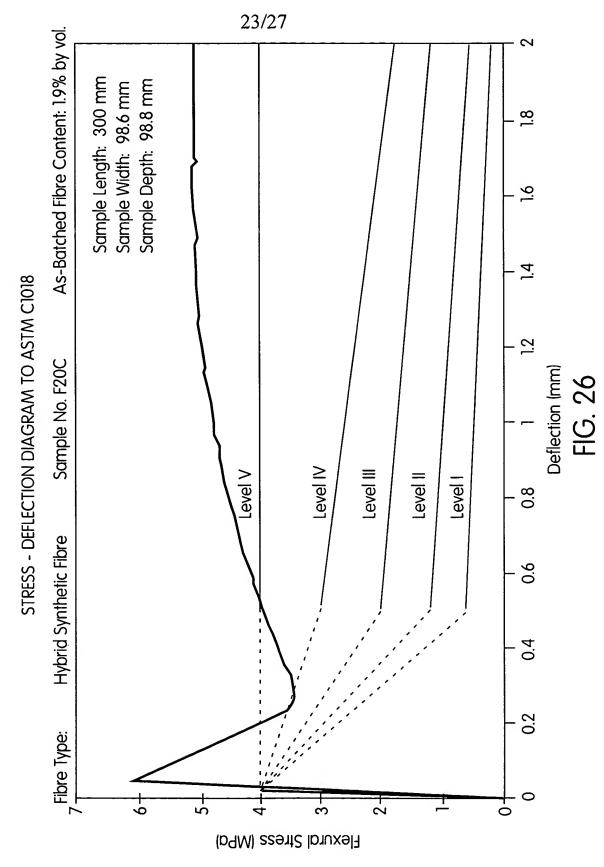

+-




Shotcrete Round Panel Testing - Mixture F10 Hybrid Synthetic Structural Fibre, 1.0% vol., Wet-Mix Shotcrete

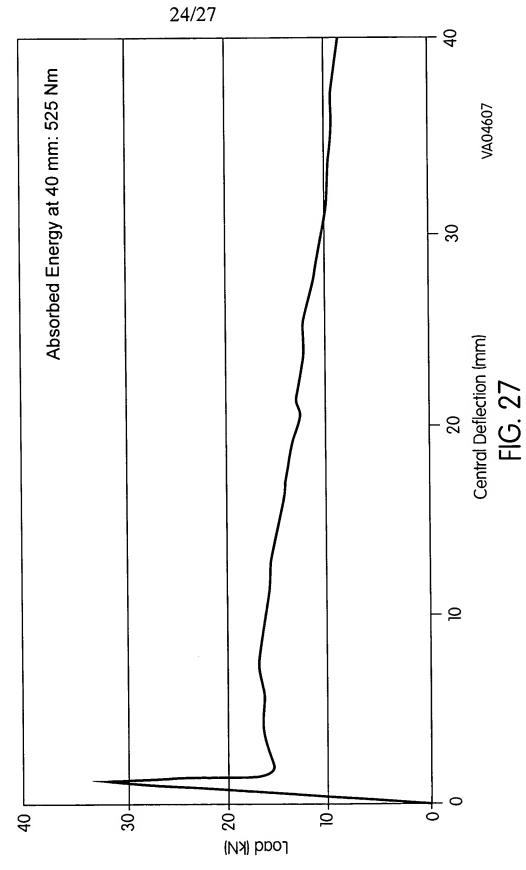




Shotcrete Round Panel Testing - Mixture F15 Hybrid Synthetic Structural Fibre, 1.5% vol., Wet-Mix Shotcrete

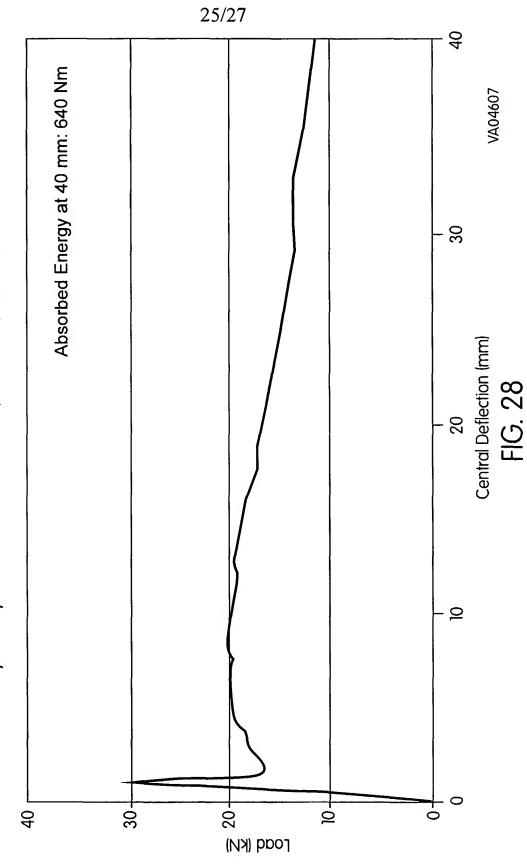

Hybrid Synthetic Structural Fibre, 1.9% vol., Wet-Mix Shotcrete Shotcrete Round Panel Testing - Mixture F20

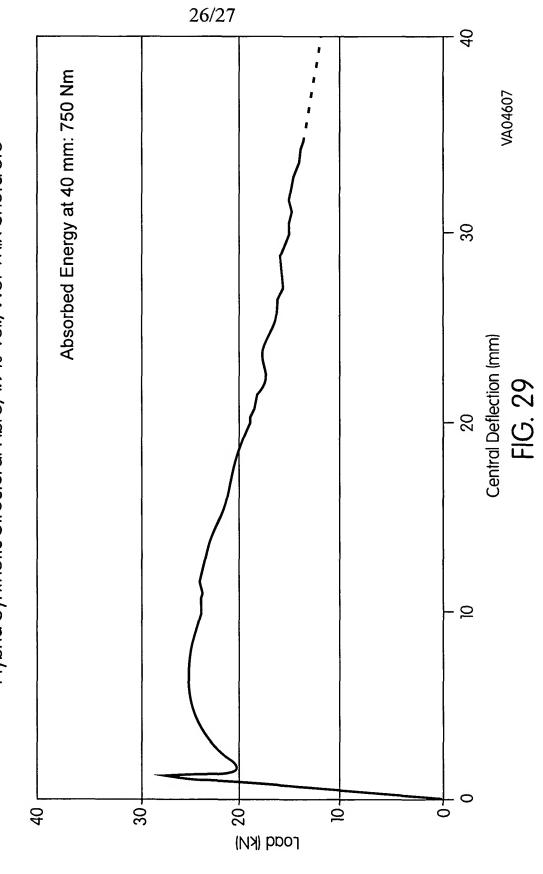



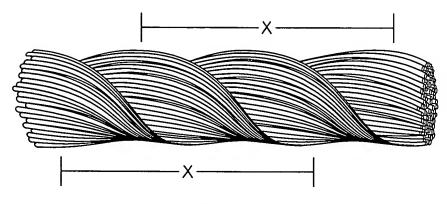


FIG. 30




FIG. 31